

LOW-MED TRAFFIC AVAILABLE UP TO 12' x 12'

Goff's Model 2000 Doors

The Goff's Model 2000 door operates at 20"/sec, making it a great fit for the smaller interior openings at your facility. Corrosion-resistant materials, such as PVC side guides, provide long term durability.

- **Travels at 20"/sec**, up to 30 cycles/hour
- **Features NEMA4X Relay Control System**
- **Reflective Photo Eye Safety Sensor**
- **Ideal Option for Low to Medium Traffic Areas**



6' x 7' door pictured with green & vision panels

STANDARD FEATURES:	Full-Width Roll Cover	Auto-Reset After Impact	Full-Width Window	Auto-Close Door Timer	Replaceable Door Panels	Fiberglass Wind Bars
---------------------------	-----------------------	-------------------------	-------------------	-----------------------	-------------------------	----------------------

Goff's Relay Control System:




Direct Drive Motor driven by our Relay Control System, available in several phase & voltage options.

Internal relay logic board interprets multiple sensor and switch inputs.

Ships assembled and **pre-wired in a NEMA4X enclosure to simplify start-up.**

Input Voltage Compatibility: 120V1P, 230V3P, 460V3P

Options & Accessories

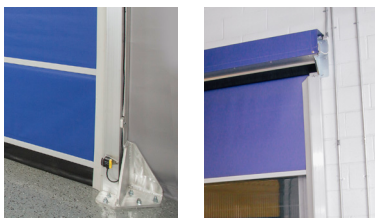


Available in **Face Mount, Projection Mount, or freestanding** via Goff's Door Support Frame.



Wide range of **safety sensor and control method options** available on request.

26 oz Vinyl Colors: (optional)



Other custom colors available with extended lead times.

18oz Vinyl Colors: (standard)

