




Goff's Edge of Dock Levelers



Mechanical Edge of Dock Leveler

The GMEOD Series is manually operated. The dock attendant simply inserts the activation bar into the unit and pulls downward to engage the platform and lip. The attendant pushes the activation bar forward to put the lip to the "service ready" position.

- Simple Pull/Push Bar Activation
- Dual Extension Spring Lifting Mechanism
- Positive Lip Extension Mechanism

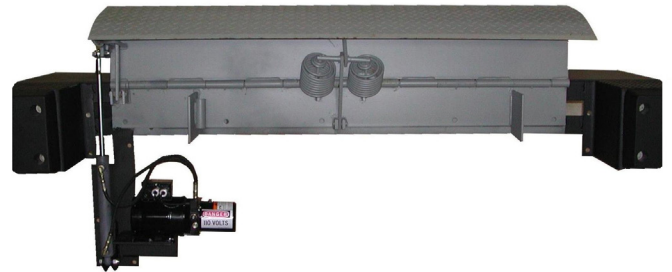

Hydraulic Edge of Dock Leveler

The Goff's GHEOD Series is a hydraulically operated edge of dock leveler. The dock attendant simply pushes the button to hydraulically position the dock leveler to the "service ready" position.

- Simple Push Button Activation
- Fully Hydraulic Lip and Deck Cylinder
- Available in Multiple Phase & Voltage Options

FEATURES & CONSTRUCTION

- High Strength Steel Construction
- Grease Fittings on Lip Tubes
- Heavy Duty Steel Bumper Blocks with Molded Rubber Bumper Pads
- 16" Bumper Projection
- Milled Lip Edge for Smooth Tire Rollover
- Operating range is 5" above & below dock level

Goff's edge of dock levelers are designed for light to moderate capacities with a range up to 30,000 lbs. All edge of dock levelers are built with a durable high tensile strength steel and come standard with steel bumper blocks and heavy duty molded rubber bumpers.

OPTIONS:

16" Refer Lip

12" Transition Plate

Formed Angle - 12"w x 12"h x 120"l

Other options & accessories available upon request

Model	Platform Size	Capacity	Model	Platform Size	Capacity
GMEOD-6620	66" x 29"	20,000 lbs.	GHEOD-6620	66" x 29"	20,000 lbs.
GMEOD-7220	72" x 29"	20,000 lbs.	GHEOD-7220	72" x 29"	20,000 lbs.
GMEOD-6630	66" x 29"	30,000 lbs.	GHEOD-6630	66" x 29"	30,000 lbs.
GMEOD-7230	72" x 29"	30,000 lbs.	GHEOD-7230	72" x 29"	30,000 lbs.
GMEOD-7830	78" x 29"	30,000 lbs.	GHEOD-7830	78" x 29"	30,000 lbs.
GMEOD-8430	84" x 29"	30,000 lbs.	GHEOD-8430	84" x 29"	30,000 lbs.

All capacities listed are tested to ANSI MH30.2-2022 Standards